



# HVAC MIRAGE

Think **SMART**. Think **COOL**. Think **MIRAGE**.

hvacmirage.us

Job name: \_\_\_\_\_

Location: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted to: \_\_\_\_\_

Submitted by: \_\_\_\_\_

Reference: \_\_\_\_\_

Approval: \_\_\_\_\_

Date: \_\_\_\_\_

Construction: \_\_\_\_\_

Unit #: \_\_\_\_\_

Drawing #: \_\_\_\_\_

## Submittal Page

Model: Multizone 18k 220 - OVMH181B

Model		OVMH181B
Performance		
Nominal Cooling	BTU/H	18,000
Nominal Heating	BTU/H	19,000
Electrical		
Voltage / Phase / Frequency		208-230V~ 60Hz, 1Ph
Recommended signal wiring		16AWG/4 Stranded, Unshielded
Minimum Circuit Ampacity	Amps	18
Recommended Fuse Size	Amps	25
Specification		
Outdoor Noise Level	DBa	58
Connection	Type	Flare
Combined Minimum Length	Feet	10
Combined Maximum Length	Feet	131
Maximum Line Length Each	Feet	82
Maximum Vertical Differential	Feet	49
Connection Pipe Size Suction	Inches	2 x 1/4
Connection Pipe Size Discharge	Inches	2 x 3/8
Physical		
Net Weight	lbs	100.31
Packing (WxDxH)	Inches	40.55 x 17.24 x 29.53
Refrigerant	Oz	R410A / 65.26



## Submittal Page

Model: Multizone 18k 220 - OVMH181B



# HVAC MIRAGE

Think **SMART**. Think **COOL**. Think **MIRAGE**.

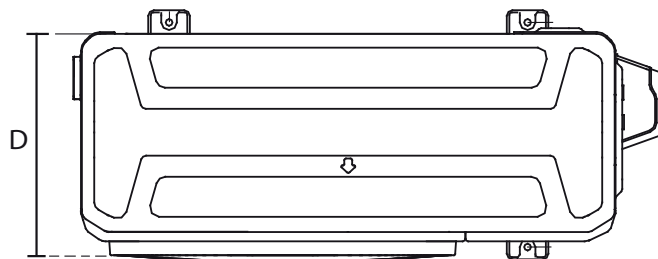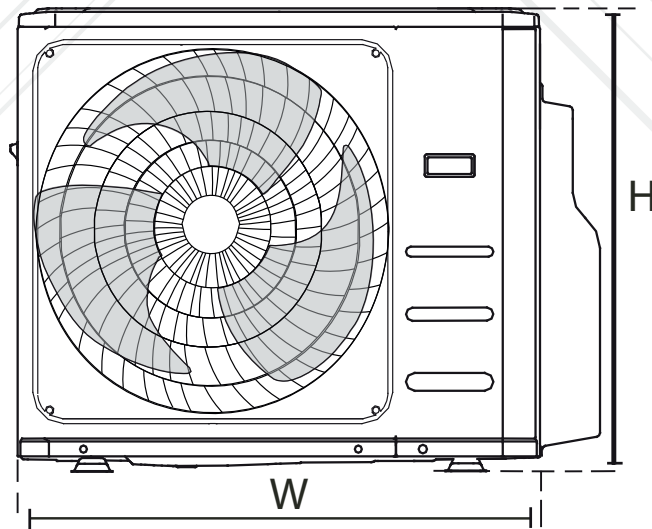



# HVAC MIRAGE

Think **SMART**. Think **COOL**. Think **MIRAGE**.

hvacmirage.us

Job name: \_\_\_\_\_

Location: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted to: \_\_\_\_\_

Submitted by: \_\_\_\_\_

Reference: \_\_\_\_\_

Approval: \_\_\_\_\_

Date: \_\_\_\_\_

Construction: \_\_\_\_\_

Unit #: \_\_\_\_\_

Drawing #: \_\_\_\_\_

## Submittal Page

Model: Multizone 27k 220 - OVMH271B

Model		OVMH271B
Performance		
Nominal Cooling	BTU/H	28,000
Nominal Heating	BTU/H	28,000
Electrical		
Voltage / Phase / Frequency		208-230V~ 60Hz, 1Ph
Recommended signal wiring		16AWG/4 Stranded, Unshielded
Minimum Circuit Ampacity	Amps	25
Recommended Fuse Size	Amps	35
Specification		
Outdoor Noise Level	DBa	63.4
Connection	Type	Flare
Combined Minimum Length	Feet	10
Combined Maximum Length	Feet	197
Maximum Line Length Each	Feet	98
Maximum Vertical Differential	Feet	49
Connection Pipe Size Suction	Inches	3 x 1/4
Connection Pipe Size Discharge	Inches	3 x 3/8
Physical		
Net Weight	lbs	139.77
Packing (WxDxH)	Inches	42.91x19.69x34.84
Refrigerant	Oz	R410A / 91.7


## Submittal Page

Model: Multizone 27k 220 - OVMH271B



# HVAC MIRAGE

Think **SMART**. Think **COOL**. Think **MIRAGE**.

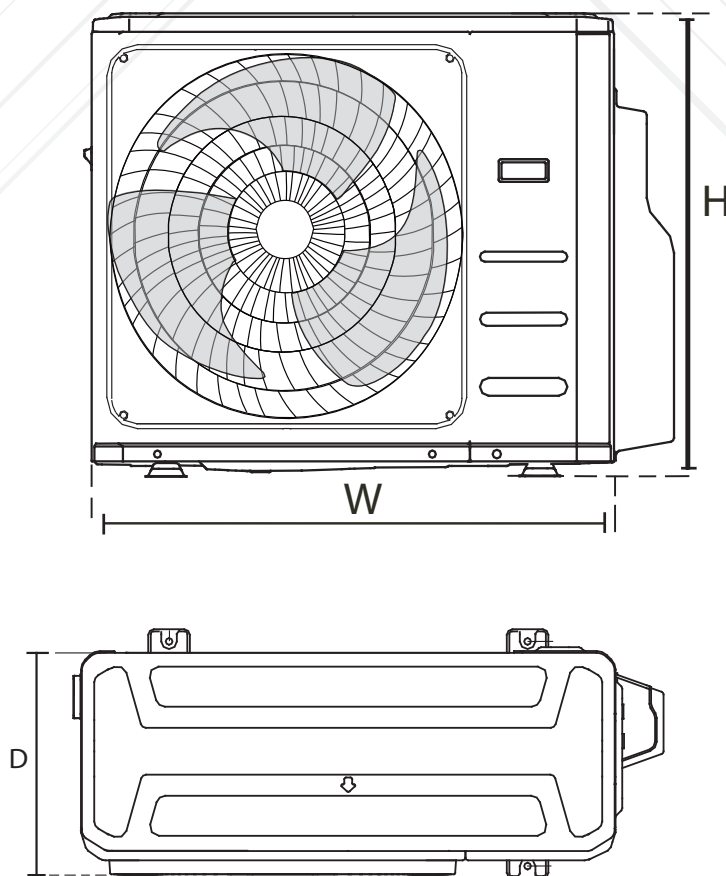



# HVAC MIRAGE

Think **SMART**. Think **COOL**. Think **MIRAGE**.

hvacmirage.us

Job name: \_\_\_\_\_

Location: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted to: \_\_\_\_\_

Submitted by: \_\_\_\_\_

Reference: \_\_\_\_\_

Approval: \_\_\_\_\_

Date: \_\_\_\_\_

Construction: \_\_\_\_\_

Unit #: \_\_\_\_\_

Drawing #: \_\_\_\_\_

## Submittal Page

Model: Multizone 36k 220 - OVMH361B

Model		OVMH361B
Performance		
Nominal Cooling	BTU/H	36,000
Nominal Heating	BTU/H	37,000
Electrical		
Voltage / Phase / Frequency		208-230V~ 60Hz, 1Ph
Recommended signal wiring		16AWG/4 Stranded, Unshielded
Minimum Circuit Ampacity	Amps	25
Recommended Fuse Size	Amps	30
Specification		
Outdoor Noise Level	DBa	62.3
Connection	Type	Flare
Combined Minimum Length	Feet	10
Combined Maximum Length	Feet	262
Maximum Line Length Each	Feet	114
Maximum Vertical Differential	Feet	49
Connection Pipe Size Suction	Inches	4 x 1/4
Connection Pipe Size Discharge	Inches	3 x 3/8 + 1 x 1/2
Physical		
Net Weight	lbs	169.09
Packing (WxDxH)	Inches	42.91x19.69x34.84
Refrigerant	Oz	R410A / 134.4



## Submittal Page

Model: Multizone 36k 220 - OVMH361B



# HVAC MIRAGE

Think **SMART**. Think **COOL**. Think **MIRAGE**.

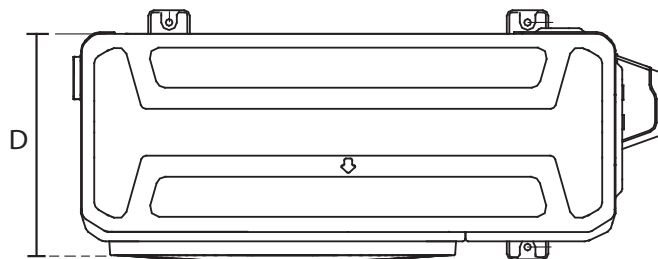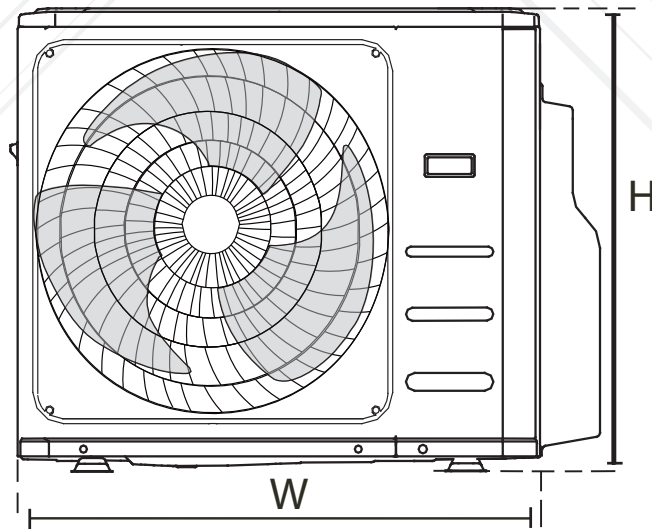



# HVAC MIRAGE

Think **SMART**. Think **COOL**. Think **MIRAGE**.

hvacmirage.us

Job name: \_\_\_\_\_

Location: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted to: \_\_\_\_\_

Submitted by: \_\_\_\_\_

Reference: \_\_\_\_\_

Approval: \_\_\_\_\_

Date: \_\_\_\_\_

Construction: \_\_\_\_\_

Unit #: \_\_\_\_\_

Drawing #: \_\_\_\_\_

## Submittal Page

Model: Multizone 48k 220 - OVMH481B

Model		OVMH481B
Performance		
Nominal Cooling	BTU/H	49,000
Nominal Heating	BTU/H	50,000
Electrical		
Voltage / Phase / Frequency		208-230V~ 60Hz, 1Ph
Recommended signal wiring		16AWG/4 Stranded, Unshielded
Minimum Circuit Ampacity	Amps	40
Recommended Fuse Size	Amps	60
Specification		
Outdoor Noise Level	DBa	64
Connection	Type	Flare
Combined Minimum Length	Feet	10
Combined Maximum Length	Feet	262
Maximum Line Length Each	Feet	114
Maximum Vertical Differential	Feet	49
Connection Pipe Size Suction	Inches	5 x 1/4
Connection Pipe Size Discharge	Inches	3 x 3/8 + 2 x 1/2
Physical		
Net Weight	lbs	225.43
Packing (WxDxH)	Inches	43.11x19.49x59.27
Refrigerant	Oz	R410A / 162

## Submittal Page

Model: Multizone 48k 220 - OVMH481B



# HVAC MIRAGE

Think **SMART**. Think **COOL**. Think **MIRAGE**.

