



mirage

Think smart. Think cool. Think Mirage.

hvacmirage.us

Job name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____

Approval: _____

Date: _____

Construction: _____

Unit #: _____

Drawing #: _____

Submittal Page

Model: Multizone 18k 220 - OVMH181A

Model		OVMH181A
Performance		
Nominal Cooling	BTU/H	18000
Nominal Heating	BTU/H	18000
Cooling Operating Range	F ° Degrees	13~122
Heating Operating Range	F ° Degrees	13~86
Outdoor Type		Extra Low + High Ambient
Electrical		
Voltage / Phase / Frequency		208-230V~ 60Hz, 1Ph
Recommended signal wiring		16AWG/4 Stranded, Unshielded
Minimum Circuit Ampacity	Amps	18
Recommended Fuse Size	Amps	25
Specification		
Outdoor Noise Level	DBa	58
Connection	Type	Flare
Combined Minimum Length	Feet	10
Combined Maximum Length	Feet	148
Maximum Line Length Each	Feet	82
Maximum Vertical Differential	Feet	33
Connection Pipe Size Suction	Inches	1/4
Connection Pipe Size Discharge	Inches	3/8
Physical		
Net Weight	lbs	105.82
Net Dimensions (WxDxH)	Inches	33.27 x 14.29 x 27.63
Refrigerant	Oz	R410A / 70.5
Refrigerant piping - Liquid side/ Gas side	Inches	2 x 1/4" x 3/8"



Submittal Page

Model: Multizone 18k 220 - OVMH181A



mirage

Think smart. Think cool. Think Mirage.

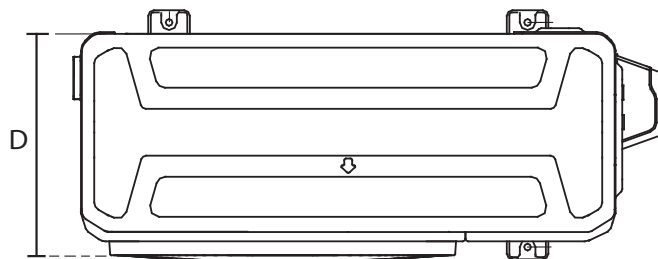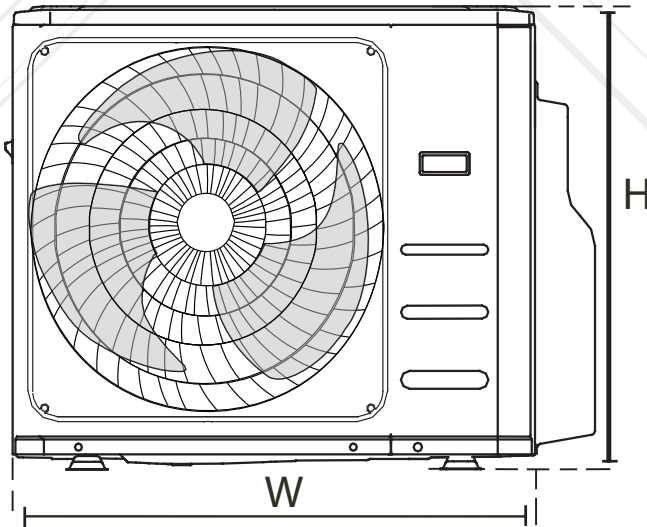



mirage

Think smart. Think cool. Think Mirage.

hvacmirage.us

Job name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____

Approval: _____

Date: _____

Construction: _____

Unit #: _____

Drawing #: _____

Submittal Page

Model: Multizone 27k 220 - OVMH271A

Model		OVMH271A
Performance		
Nominal Cooling	BTU/H	27000 (6880-30500)
Nominal Heating	BTU/H	27000 (4210-36200)
Cooling Operating Range	F ° Degrees	-13~122
Heating Operating Range	F ° Degrees	-13~86
Outdoor Type		Extra Low + High Ambient
Electrical		
Voltage / Phase / Frequency		208-230V~ 60Hz, 1Ph
Recommended signal wiring		16AWG/4 Stranded, Unshielded
Minimum Circuit Ampacity	Amps	25
Recommended Fuse Size	Amps	35
Specification		
Outdoor Noise Level	DBa	63.4
Connection	Type	Flare
Combined Minimum Length	Feet	10
Combined Maximum Length	Feet	148
Maximum Line Length Each	Feet	82
Maximum Vertical Differential	Feet	33
Connection Pipe Size Suction	Inches	1/4
Connection Pipe Size Discharge	Inches	3/8
Physical		
Net Weight	lbs	149.91
Net Dimensions (WxDxH)	Inches	37.24 x 16.14 x 31.89
Refrigerant	Oz	R410A / 98.8
Refrigerant piping - Liquid side/ Gas side	Inches	3 x 1/4" - 3/8"



Submittal Page

Model: Multizone 27k 220 - OVMH271A



mirage

Think smart. Think cool. Think Mirage.

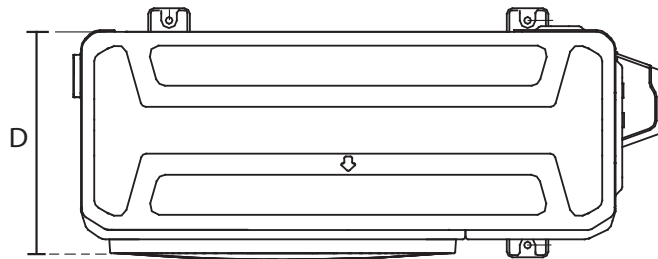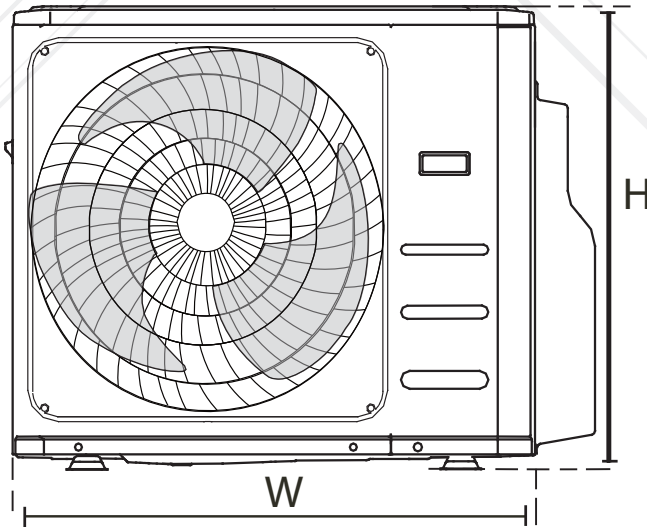



mirage

Think smart. Think cool. Think Mirage.

hvacmirage.us

Job name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____

Approval: _____

Date: _____

Construction: _____

Unit #: _____

Drawing #: _____

Submittal Page

Model: Multizone 36k 220 - OVMH361A

Model		OVMH361A
Performance		
Nominal Cooling	BTU/H	36000(5630-38510)
Nominal Heating	BTU/H	36000(4960-42660)
Cooling Operating Range	F ° Degrees	-13~122
Heating Operating Range	F ° Degrees	-13~86
Outdoor Type		Extra Low + High Ambient
Electrical		
Voltage / Phase / Frequency		208-230V~ 60Hz, 1Ph
Recommended signal wiring		16AWG/4 Stranded, Unshielded
Minimum Circuit Ampacity	Amps	30
Recommended Fuse Size	Amps	45
Specification		
Outdoor Noise Level	DBa	62.3
Connection	Type	Flare
Combined Minimum Length	Feet	10
Combined Maximum Length	Feet	197
Maximum Line Length Each	Feet	98
Maximum Vertical Differential	Feet	33
Connection Pipe Size Suction	Inches	1/4
Connection Pipe Size Discharge	Inches	3/8
Physical		
Net Weight	lbs	156.53
Net Dimensions (WxDxH)	Inches	37.24 x 16.14 x 31.89
Refrigerant	Oz	R410A / 105.8
Refrigerant piping - Liquid side/ Gas side	Inches	3 x 1/4" - 3/8" + 1 x 1/4" - 1/2"



Submittal Page

Model: Multizone 36k 220 - OVMH361A



mirage

Think smart. Think cool. Think Mirage.

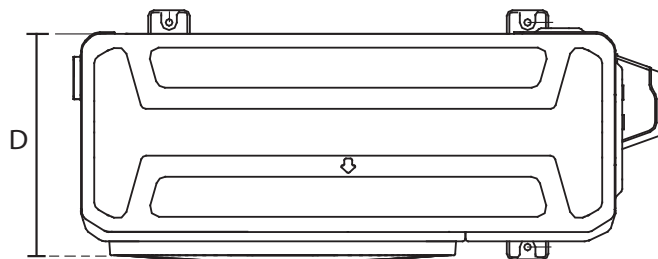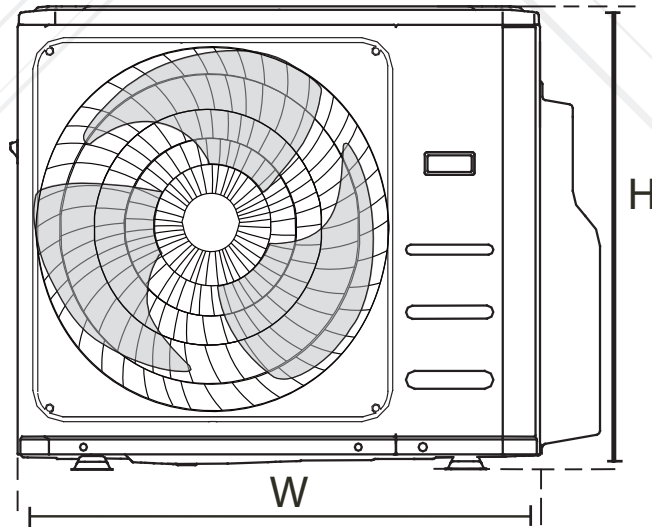



mirage

Think smart. Think cool. Think Mirage.

hvacmirage.us

Job name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____

Approval: _____

Date: _____

Construction: _____

Unit #: _____

Drawing #: _____

Submittal Page

Model: Multizone 48k 220 - OVMH481A

Model		OVMH481A
Performance		
Nominal Cooling	BTU/H	48000(8860-52500)
Nominal Heating	BTU/H	48000(6480-54050)
Cooling Operating Range	F ° Degrees	-13~122
Heating Operating Range	F ° Degrees	-13~86
Outdoor Type		Extra Low + High Ambient
Electrical		
Voltage / Phase / Frequency		208-230V~ 60Hz, 1Ph
Recommended signal wiring		16AWG/4 Stranded, Unshielded
Minimum Circuit Ampacity	Amps	35
Recommended Fuse Size	Amps	50
Specification		
Outdoor Noise Level	DBa	64
Connection	Type	Flare
Combined Minimum Length	Feet	10
Combined Maximum Length	Feet	246
Maximum Line Length Each	Feet	98
Maximum Vertical Differential	Feet	33
Connection Pipe Size Suction	Inches	1/4
Connection Pipe Size Discharge	Inches	3/8
Physical		
Net Weight	lbs	223.77
Net Dimensions (WxDxH)	Inches	37.48 x 16.34 x 52.48
Refrigerant	Oz	R410A / 162.3
Refrigerant piping - Liquid side/ Gas side	Inches	3 x 1/4" - 3/8" + 2 x 1/4" - 1/2"

Submittal Page

Model: Multizone 48k 220 - OVMH481A



mirage

Think smart. Think cool. Think Mirage.

